



FS System Head Adjustment Curves
 Model: 3521 (1750 RPM, Inlet 2.5", Outlet 2")
 Rotor-Stator: 12-11

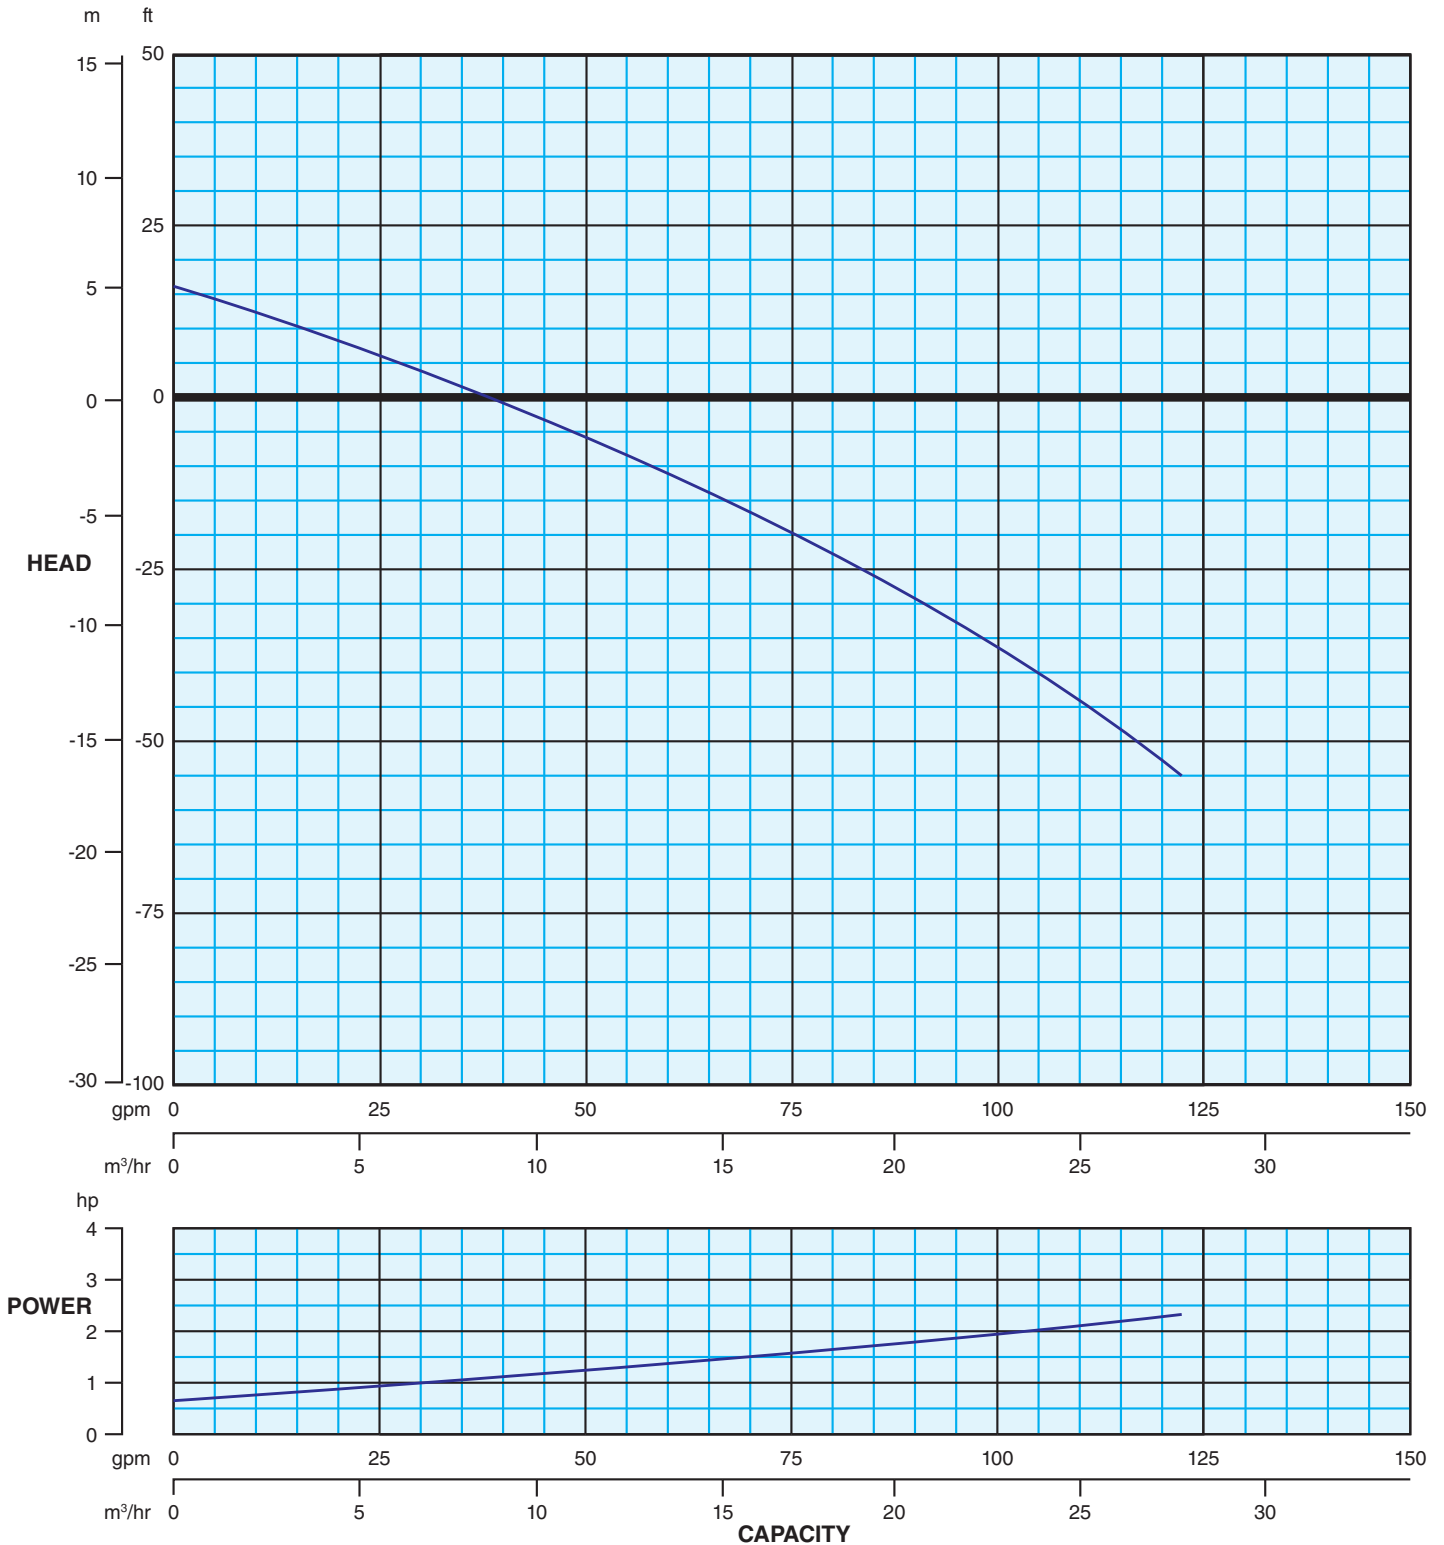


Curve based on tests using 70°F water fed by a centrifugal pump. A tolerance of $\pm 5\%$ applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

FS System Head Adjustment Curves
 Model: 3521 (1750 RPM, Inlet 2.5", Outlet 2")
 Rotor-Stator: 13-11

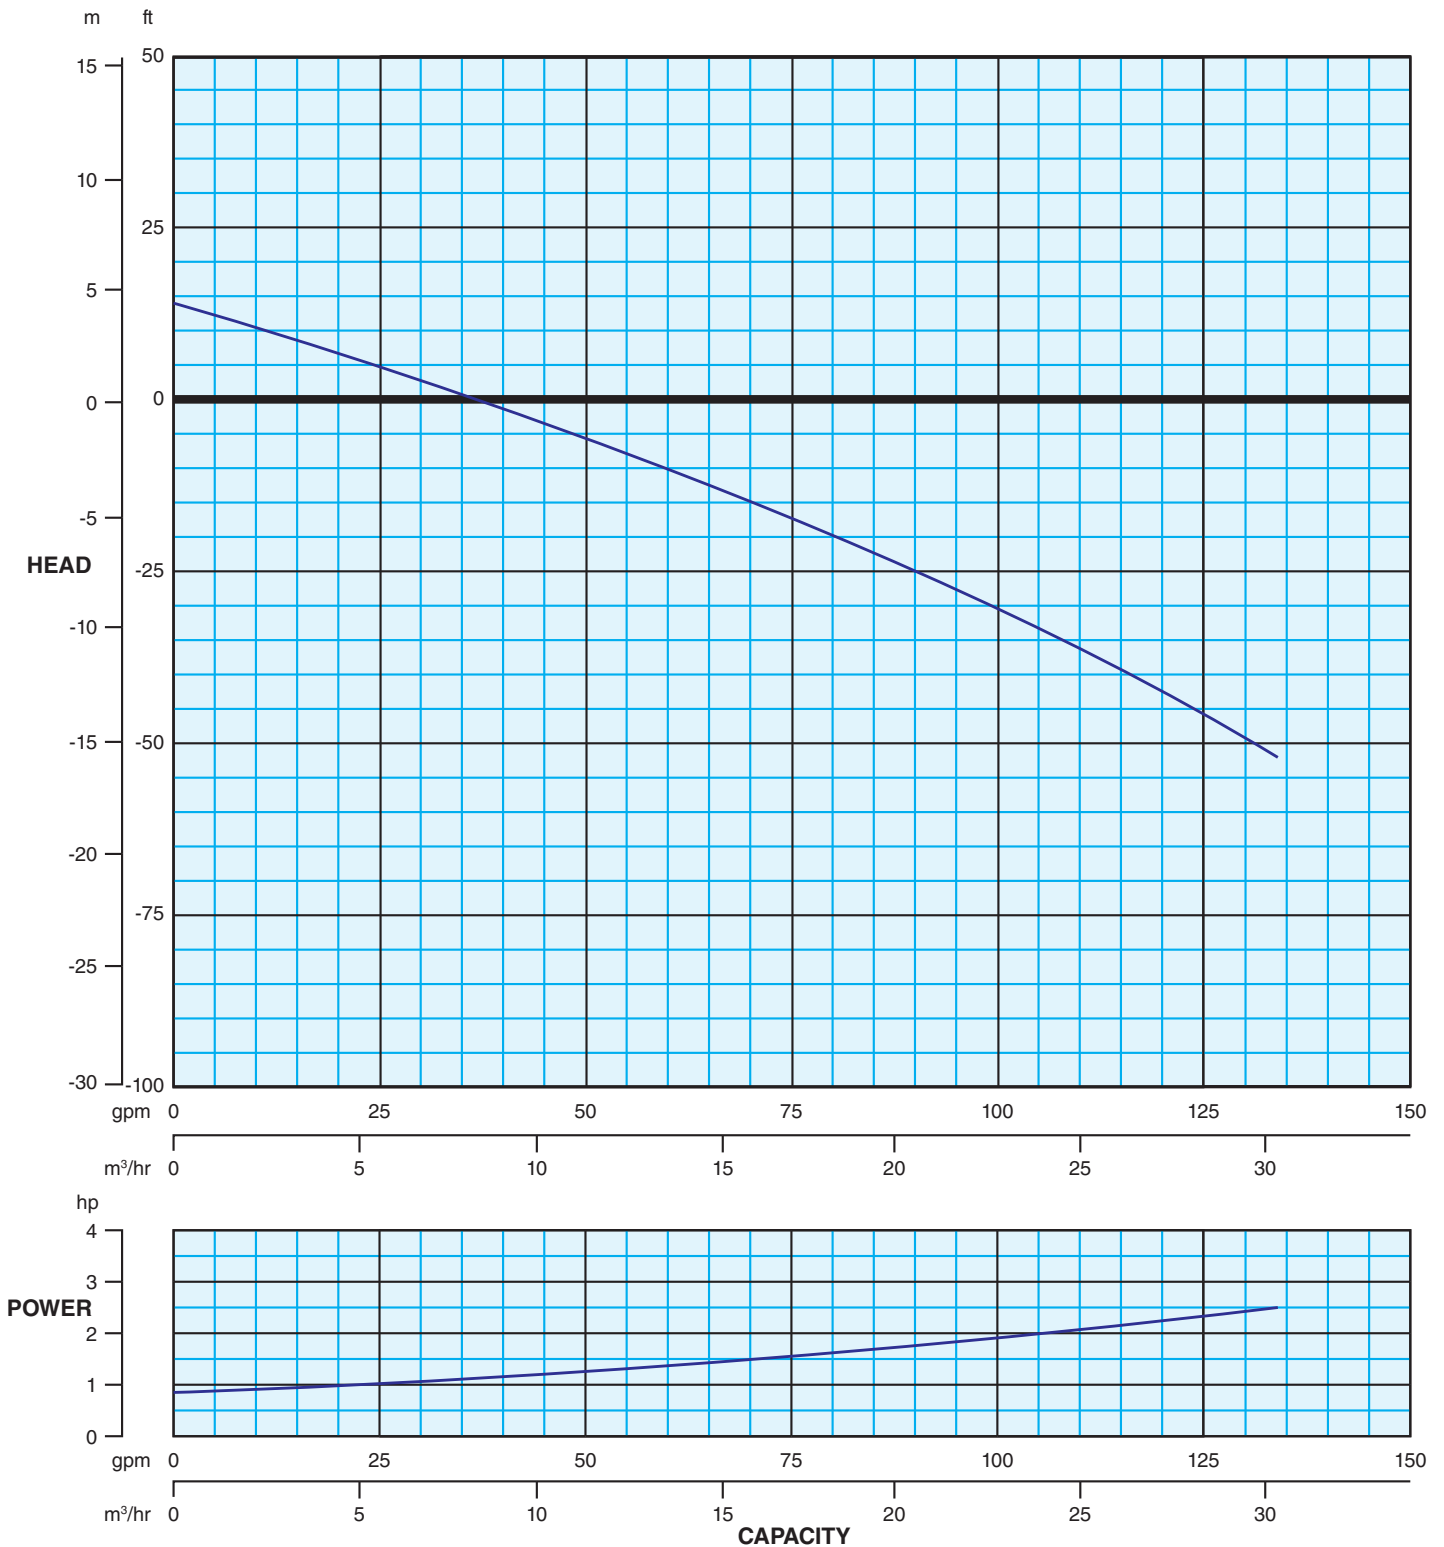

Curve based on tests using 70°F water fed by a centrifugal pump. A tolerance of $\pm 5\%$ applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

FS System Head Adjustment Curves
 Model: 3521 (1750 RPM, Inlet 2.5", Outlet 2")
 Rotor-Stator: 20-20

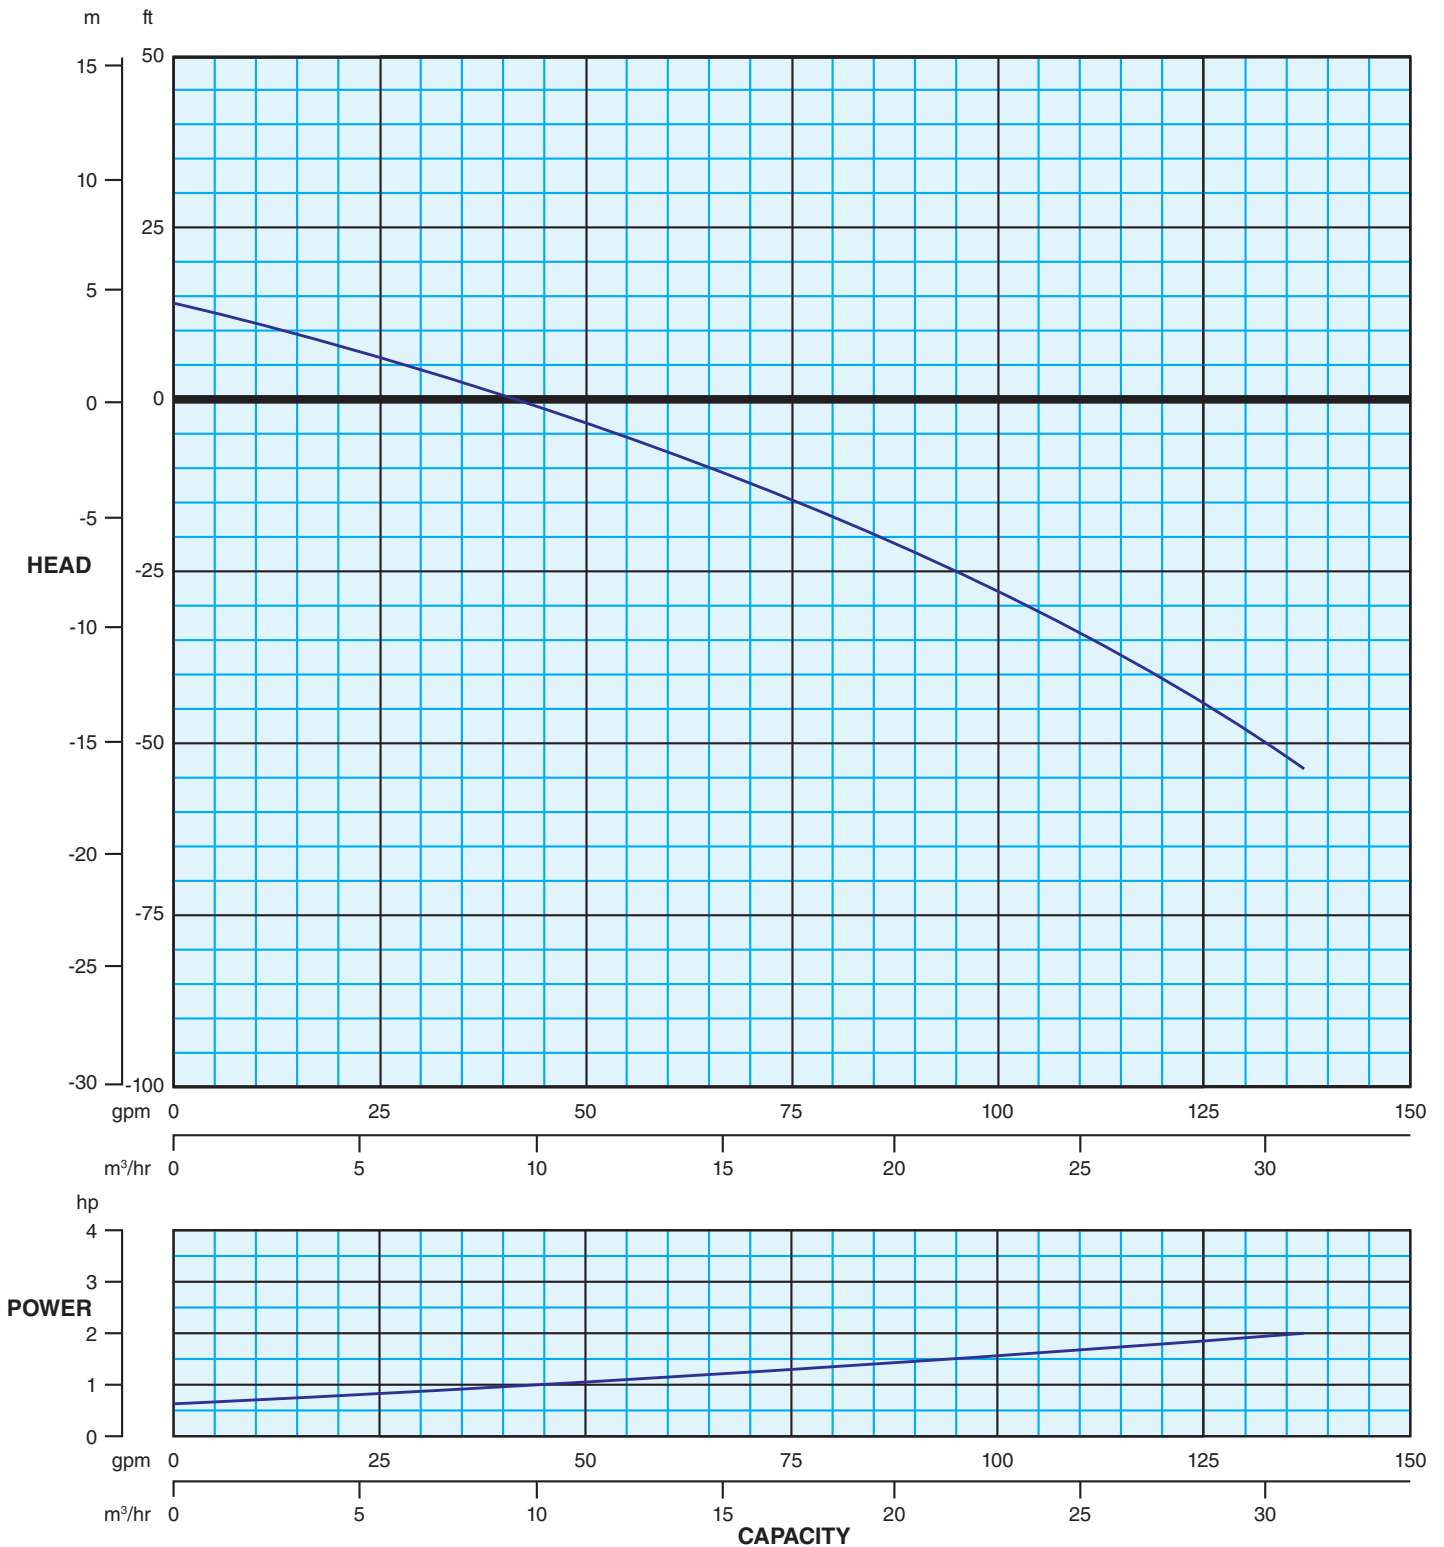

Curve based on tests using 70°F water fed by a centrifugal pump. A tolerance of $\pm 5\%$ applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.