



**FS System Head Adjustment Curves**  
 Model: 3531 (1750 RPM, Inlet 2.5", Outlet 2")  
 Rotor-Stator: 12-11

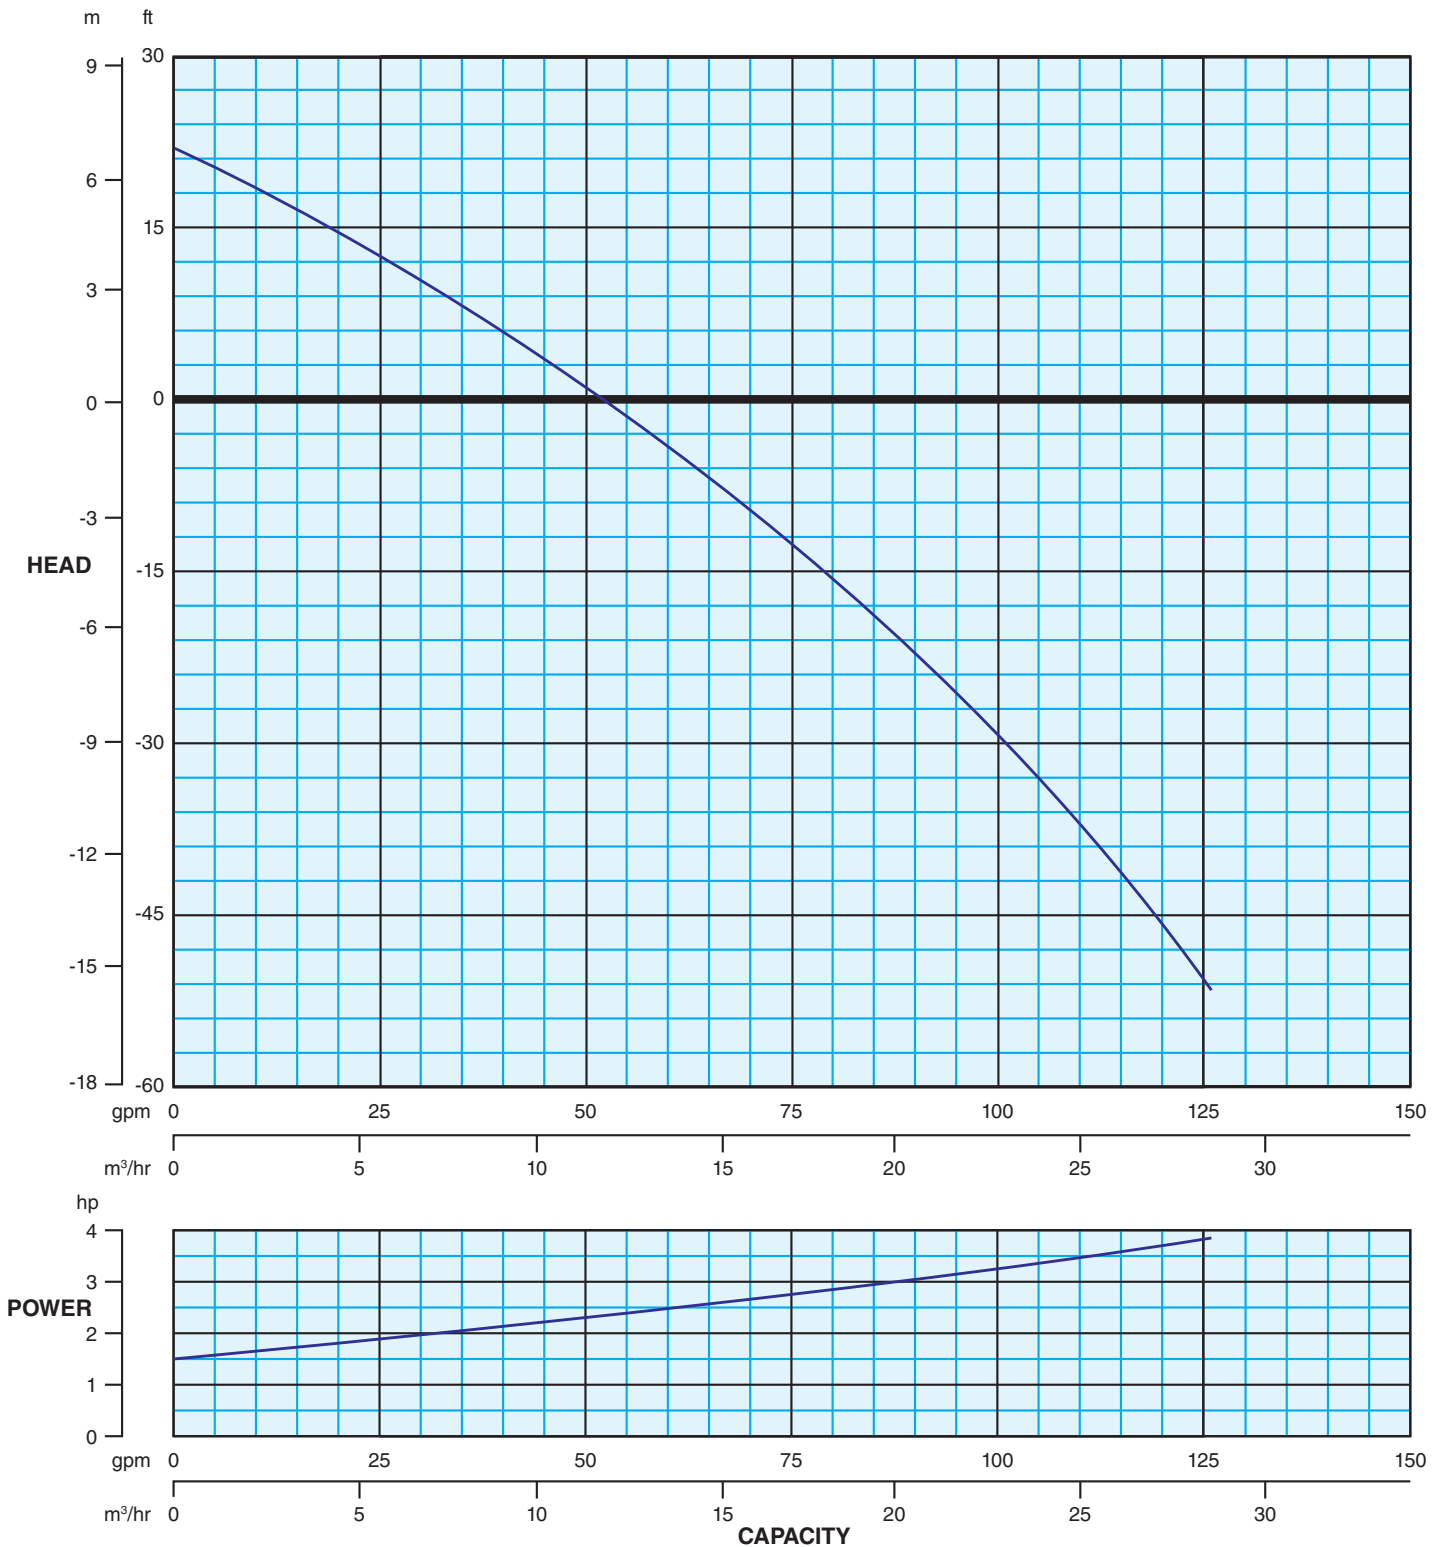


Curve based on tests using 70°F water fed by a centrifugal pump. A tolerance of  $\pm 5\%$  applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

**FS System Head Adjustment Curves**  
 Model: 3531 (1750 RPM, Inlet 2.5", Outlet 2")  
 Rotor-Stator: 13-11

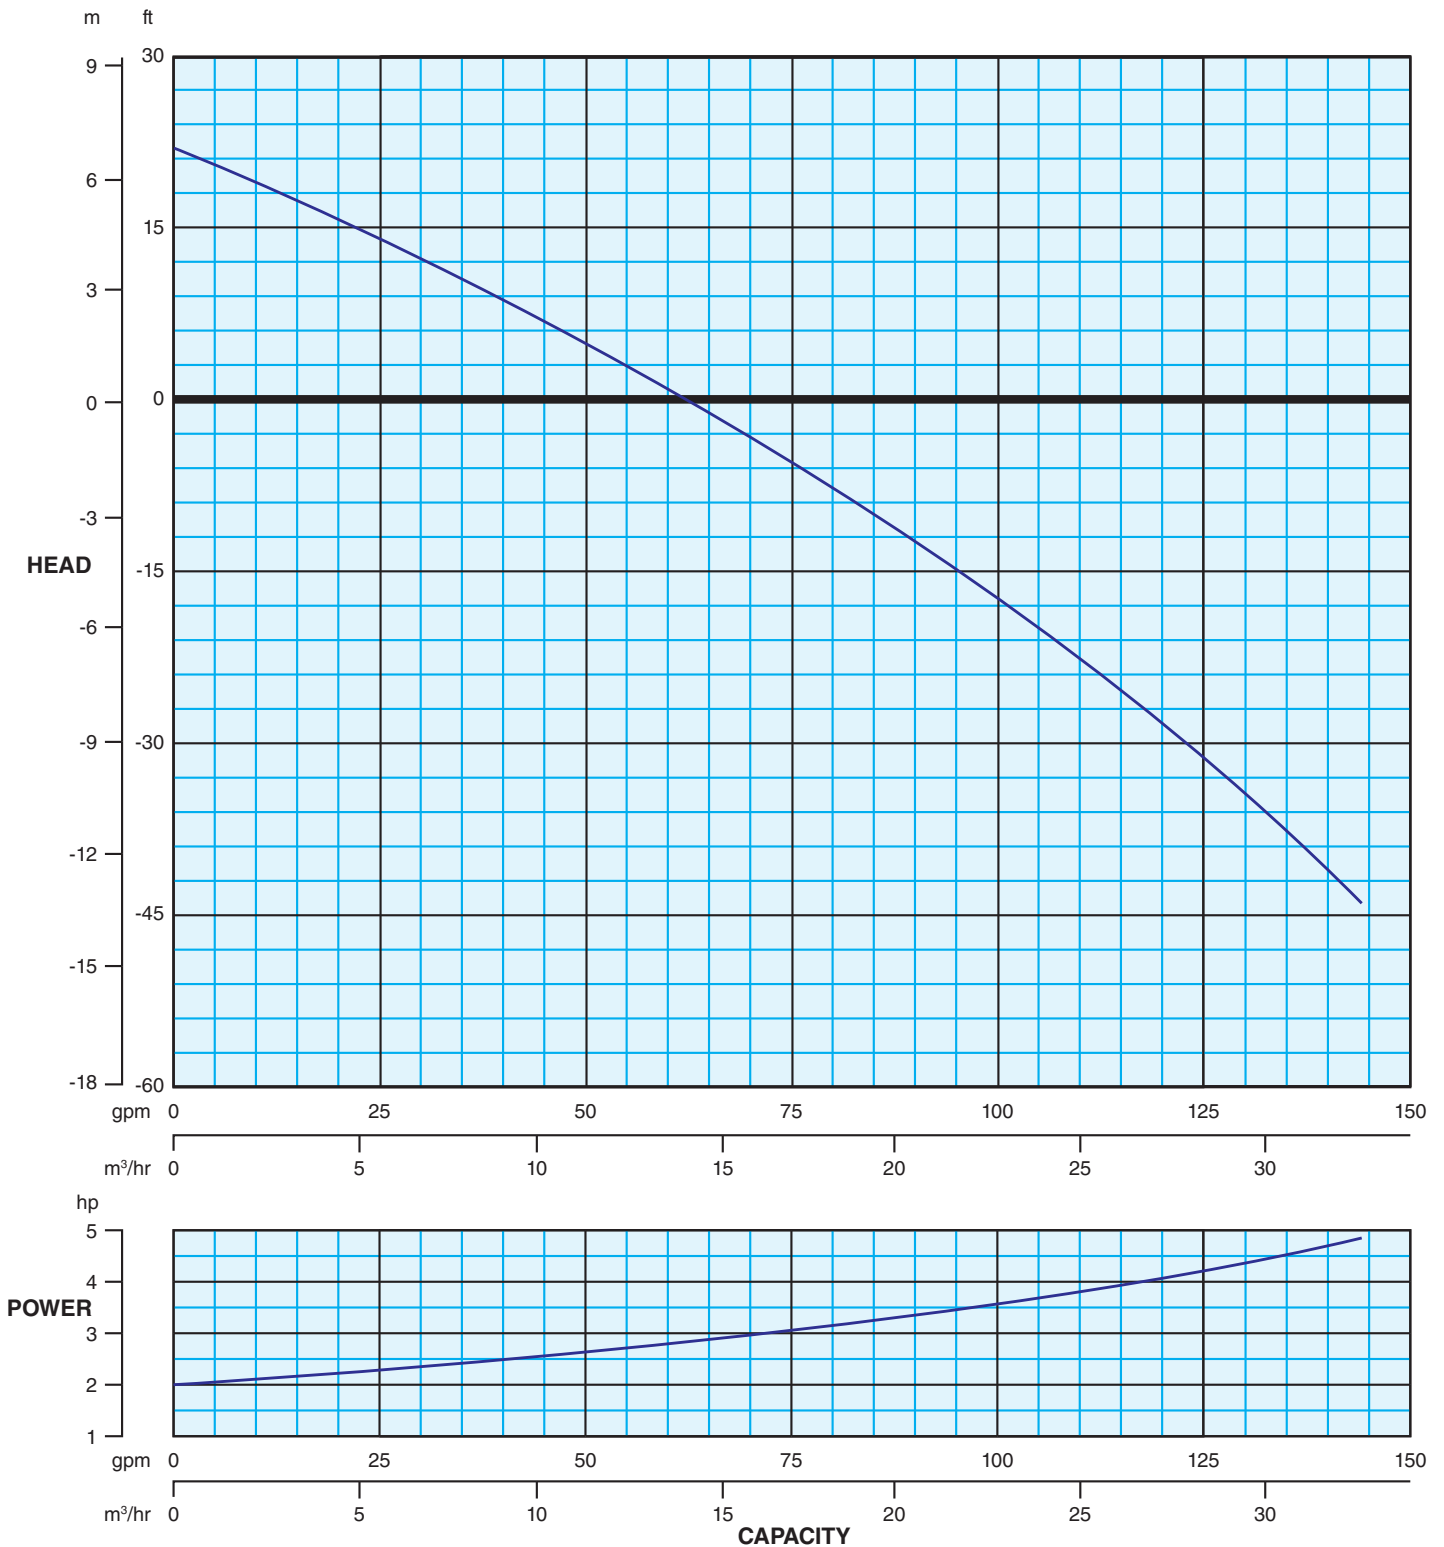

Curve based on tests using 70°F water fed by a centrifugal pump. A tolerance of  $\pm 5\%$  applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

**FS System Head Adjustment Curves**  
 Model: 3531 (1750 RPM, Inlet 2.5", Outlet 2")  
 Rotor-Stator: 20-20

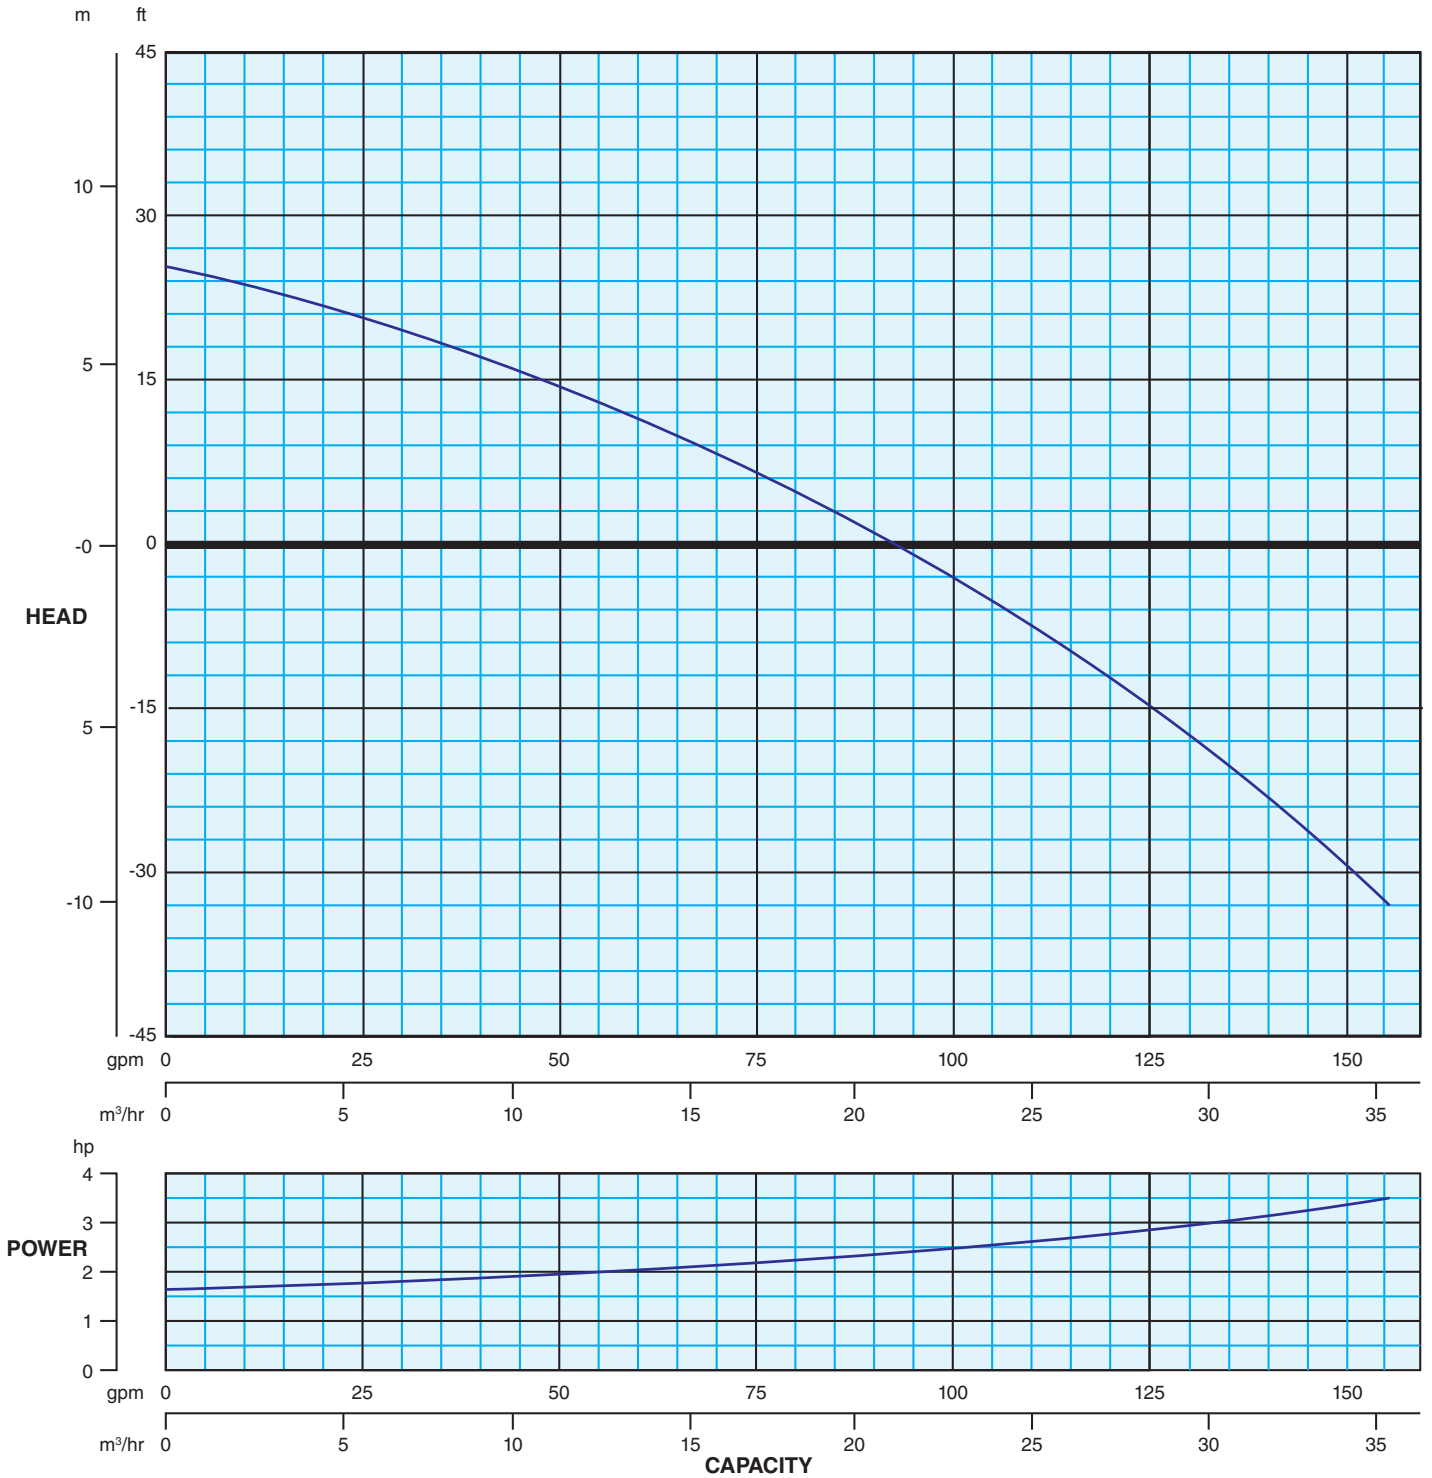

Curve based on tests using 70°F water fed by a centrifugal pump. A tolerance of  $\pm 5\%$  applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.