


# Diagramas dimensionales de FS

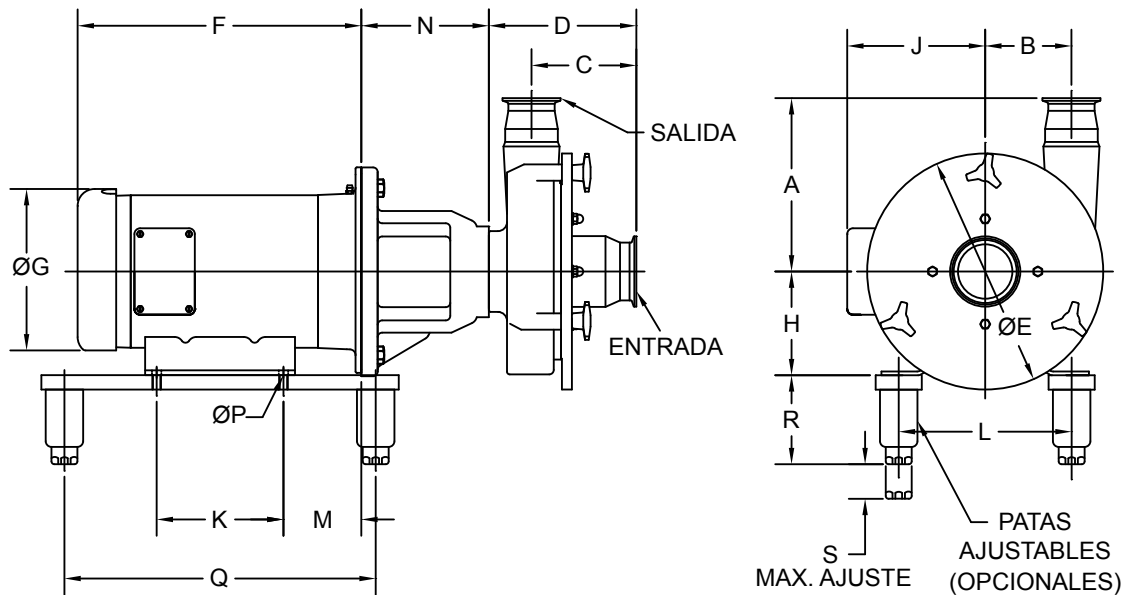

1265000137  
REV. B

MODELO	ENTRADA	SALIDA	A	B	C	D	E
711 / 712	2"	1.5"	144 5.67"	58 2.28"	113 4.45"	145 5.71"	185 7.28"
721 / 722	2"	1.5"	170 6.69"	79 3.11"	113 4.45"	145 5.71"	230 9.06"
3521 / 3522	2.5"	2"	190 7.48"	80 3.15"	118 4.65"	157.5 6.2"	230 9.06"
3531 / 3532	2.5"	2"	191 7.52"	95 3.74"	115.5 4.55"	157.5 6.2"	260 10.24"
3541 / 3542	3"	2.5"	211 8.31"	115 4.53"	118 4.65"	157.5 6.2"	290 11.42"
3551 / 3552	3"	2.5"	230 9.06"	140 5.51"	119 4.69"	170 6.69"	350 13.78"

TODAS LAS DIMENSIONES ESTAN EN MILIMETROS (PULGADAS)

POTENCIA DEL MOTOR		ARMAZON DEL MOTOR	F	G	H	J	K	L	M	N	P	Q	R	S
1750 RPM	3500 RPM													
1 HP	1.5 HP	143TC	284 11.18"	175 6.89"	89 3.5"	133 5.25"	101.6 4"	140 5.5"	127 5"	120 4.72"	8.7 0.34"	356 14"	98 3.86"	38 1.5"
1.5 HP		145TC	284 11.18"	175 6.89"	89 3.5"	133 5.25"	127 5"	140 5.5"	127 5"	120 4.72"	8.7 0.34"	356 14"	98 3.86"	38 1.5"
2 HP	2 HP	145TC	284 11.18"	175 6.89"	89 3.5"	133 5.25"	127 5"	140 5.5"	127 5"	120 4.72"	8.7 0.34"	356 14"	98 3.86"	38 1.5"
	3 HP	182TC	340 13.39"	221 8.7"	114 4.5"	149 5.87"	114 4.5"	191 7.5"	108 4.25"	169 6.65"	10.3 0.41"	356 14"	98 3.86"	38 1.5"
3 HP		182TC	354 13.94"	221 8.7"	114 4.5"	149 5.87"	114 4.5"	191 7.5"	108 4.25"	169 6.65"	10.3 0.41"	356 14"	98 3.86"	38 1.5"
	5 HP	184TC	354 13.94"	221 8.7"	114 4.5"	149 5.87"	140 5.5"	191 7.5"	108 4.25"	169 6.65"	10.3 0.41"	356 14"	98 3.86"	38 1.5"
5 HP		184TC	354 13.94"	221 8.7"	114 4.5"	149 5.87"	140 5.5"	191 7.5"	108 4.25"	169 6.65"	10.3 0.41"	356 14"	98 3.86"	38 1.5"
	7.5 HP	184TC	423 16.65"	221 8.7"	114 4.5"	149 5.87"	140 5.5"	191 7.5"	108 4.25"	169 6.65"	10.3 0.41"	356 14"	98 3.86"	38 1.5"
7.5 HP		213TC	403 15.87"	260 10.25"	133 5.25"	187 7.38"	140 5.5"	216 8.5"	108 4.25"	169 6.65"	10.3 0.41"	356 14"	98 3.86"	38 1.5"
	10 HP	215TC	403 15.87"	260 10.25"	133 5.25"	187 7.38"	178 7"	216 8.5"	108 4.25"	169 6.65"	10.3 0.41"	356 14"	98 3.86"	38 1.5"
10 HP		215TC	416 16.38"	260 10.25"	133 5.25"	187 7.38"	178 7"	216 8.5"	108 4.25"	169 6.65"	10.3 0.41"	356 14"	98 3.86"	38 1.5"
	15 HP	215TC	515 20.28"	260 10.25"	133 5.25"	187 7.38"	178 7"	216 8.5"	108 4.25"	169 6.65"	10.3 0.41"	356 14"	98 3.86"	38 1.5"
15 HP		254TC	499 19.65"	327 12.87"	159 6.25"	244 9.63"	210 8.25"	254 10"	102 4"	169 6.65"	13.5 0.53"	406 16"	98 3.86"	38 1.5"
	20 HP	256TC	499 19.65"	327 12.87"	159 6.25"	244 9.63"	254 10"	254 10"	102 4"	169 6.65"	13.5 0.53"	406 16"	98 3.86"	38 1.5"
20 HP		256TC	499 19.65"	327 12.87"	159 6.25"	244 9.63"	254 10"	254 10"	102 4"	169 6.65"	13.5 0.53"	406 16"	98 3.86"	38 1.5"
	25 HP	284TSC	588 23.15"	371 14.63"	178 7"	333 13.13"	241 9.5"	279 11"	121 4.75"	179 7.05"	13.5 0.53"	445 17.5"	118 4.63"	45 1.75"
25 HP		284TC	588 23.15"	371 14.63"	178 7"	333 13.13"	241 9.5"	279 11"	121 4.75"	179 7.05"	13.5 0.53"	445 17.5"	118 4.63"	45 1.75"
	30 HP	286TSC	588 23.15"	371 14.63"	178 7"	333 13.13"	279 11"	279 11"	121 4.75"	179 7.05"	13.5 0.53"	445 17.5"	118 4.63"	45 1.75"
30 HP		286TC	588 23.15"	371 14.63"	178 7"	333 13.13"	279 11"	279 11"	121 4.75"	179 7.05"	13.5 0.53"	445 17.5"	118 4.63"	45 1.75"
	40 HP	324TSC	636 25.04"	419 16.5"	203 8"	359 14.13"	267 10.5"	318 12.5"	121 4.75"	179 7.05"	16.7 0.66"	470 18.5"	118 4.63"	45 1.75"
40 HP		324TC	636 25.04"	419 16.5"	203 8"	359 14.13"	267 10.5"	318 12.5"	121 4.75"	179 7.05"	16.7 0.66"	470 18.5"	118 4.63"	45 1.75"
	50 HP	326TSC	636 25.04"	419 16.5"	203 8"	359 14.13"	305 12"	318 12.5"	121 4.75"	179 7.05"	16.7 0.66"	470 18.5"	118 4.63"	45 1.75"
50 HP		326TC	636 25.04"	419 16.5"	203 8"	359 14.13"	305 12"	318 12.5"	121 4.75"	179 7.05"	16.7 0.66"	470 18.5"	118 4.63"	45 1.75"
	60 HP	364 TSC	685 26.97"	470 18.5"	229 9.02"	383 15.08"	286 11.26"	356 14.02"	89 3.5"	209 8.23"	16.7 0.66"	508 20"	127 5"	45 1.75"
60 HP		364 TC	685 26.97"	470 18.5"	229 9.02"	383 15.08"	286 11.26"	356 14.02"	89 3.5"	209 8.23"	16.7 0.66"	508 20"	127 5"	45 1.75"
	75 HP	365 TSC	685 26.97"	470 18.5"	229 9.02"	383 15.08"	311 12.24"	356 14.02"	89 3.5"	209 8.23"	16.7 0.66"	508 20"	127 5"	45 1.75"
75 HP		365 TC	685 26.97"	470 18.5"	229 9.02"	383 15.08"	311 12.24"	356 14.02"	89 3.5"	209 8.23"	16.7 0.66"	508 20"	127 5"	45 1.75"

1265000135  
Rev.B